

Reliable®

Model ● VELO PEND

Very Extra Large Orifice
Pendent Sprinkler
NFPA 13, 231, and 231C

Bulletin 146A

**Lower Pressures for
High Hazard Protection**
.70 Orifice, 14.5 K Factor,
7psi Minimum End Head Pressure,
UL and cUL Listed, FM Approved,
NYC MEA 258-93-E

Features

The Reliable Model G VELO sprinkler offers the opportunity for:


1. Pipe size reduction
2. Fewer sprinklers
3. Elimination of booster pumps
4. The best choice for densities of .38 or larger
5. Storage within 18" of the deflector (UL and cUL applications only)
6. Simplifies future ESFR conversions

Product Description

The Reliable Model G VELO sprinkler is a very extra large orifice pendent sprinkler that has been designed to control high challenge fires in both palletized and rack storage occupancies utilizing lower water pressures. The Model G VELO pendent utilizes a center strut solder in compression fusible element.

It has been proven in UL and FM full-scale fire testing; complies with all applicable mechanical and hydraulic requirements of the latest sprinkler standards and is listed by Underwriters Laboratories, certified for Canada by Underwriters Laboratories and approved by Factory Mutual Research Corporation.

This product is intended for use as a standard spray sprinkler in hydraulically designed systems with a minimum pressure of 7 psi in accordance with the area/density curves of NFPA 13, 231, or 231C and for all area/density methods of design as referenced by Factory Mutual Loss Prevention Data Sheets.

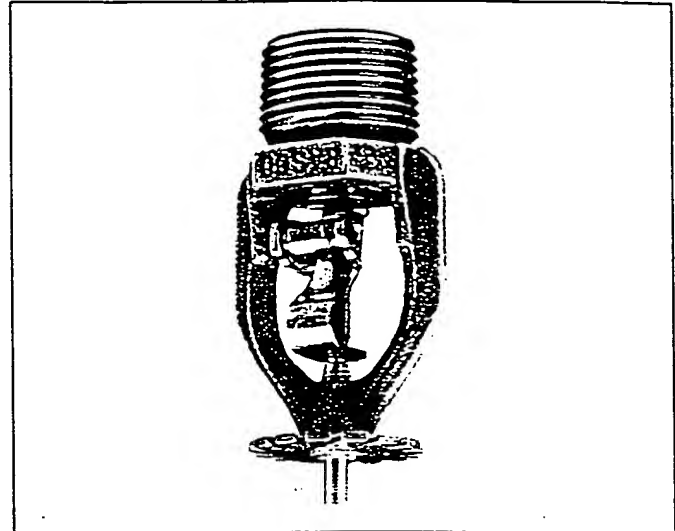

Installation

Reliable's Model G VELO Pendent sprinkler must be installed according to the NFPA Standards shown below or the appropriate Factory Mutual Loss Prevention Data Sheet as well as the authority having jurisdiction.

NFPA Standard	Underwriters Laboratories	Certified for Canada By Underwriters Laboratories	Factory + Mutual
13	Yes	Yes	Yes
231*	Yes	Yes	Yes
231C*	Yes	Yes	Yes

* TIA 95-1 (NFPA 231) and 95-1 (NFPA 231C) have been approved for acceptance into the above NFPA standards. As these standards are revised, the VELO will be included. The VELO is included in NFPA 13.

+ The Model G VELO is approved by Factory Mutual for all area/density methods of design as referenced by FM Loss Prevention Data Sheets.

BEST AVAILABLE COPY

Installation Data

Sprinkler Type	"K" Factor		Sprinkler Height	Approvals
	US	Metric		
Pendent .70 orifice with 3/4" NPT	14.5	209.0	3.10"	1,2,3,4

Temperature Ratings

Classification	Sprinkler Rating		Maximum Ceiling Temperature		Frame Color
	°F	°C	°F	°C	
Ordinary	165	74	100	38	Uncolored
Intermediate	212	100	150	66	White
High	286	141	225	107	Blue

Finishes

Approvals	
Natural Bronze	-All Temperature Ratings
Bright Chrome Plated	-All Temperature Ratings
Lead Plated	-165°F, 212°F, & 286°F Temp Ratings
Corroproofed	-165°F Clear Wax, 212°F Brown Wax
Corroproofed Over Lead Plated	-165°F Clear Wax, 212°F Brown Wax

Design Criteria

The following criteria apply when designing an automatic sprinkler system utilizing the Model G VELO sprinkler for NFPA 13, 231 and 231C applications.

- The same design criteria that are applied to 1/2" and 3/32" orifice sprinklers.
- Sprinkler spacing shall be a minimum of 6 ft.
- Minimum design pressure 7 psi.
- Factory Mutual approval for Model G VELO sprinkler requires sprinkler installation directly into a branch line fitting. The use of drops or arm overs is not permitted.
- Factory Mutual Loss Prevention Data Sheets contain requirements which differ from NFPA.

The Model G VELO sprinkler is not a "Large Drop" or "ESFR" sprinkler.

Maintenance

The Model G VELO Sprinkler should be inspected quarterly and the sprinkler system maintained in accordance with NFPA 25. Do not clean sprinklers with soap and water, ammonia or any other cleaning fluids. Remove dust by using a soft brush or gentle vacuuming. Remove any sprinkler which has been painted (other than factory applied) or damaged in any way. A stock of spare sprinklers should be maintained to allow quick replacement of damaged or operated sprinklers.

Patents

Patents are pending.

Approvals

1. Underwriters Laboratories, Inc.
2. Underwriters Laboratories Certification for Canada
3. Factory Mutual Research Corp.
4. NYC MEA 258-93-E

ULI Guide Number

VNIV

ULI Listing Category

Sprinklers, Automatic & Open

Ordering Information


Specify:

1. Sprinkler Model
2. Temperature Rating
3. Finishes

Model H Sprinkler Wrench



Use only the Model H sprinkler wrench for sprinkler removal and installation. Any other type of wrench may damage the sprinkler.

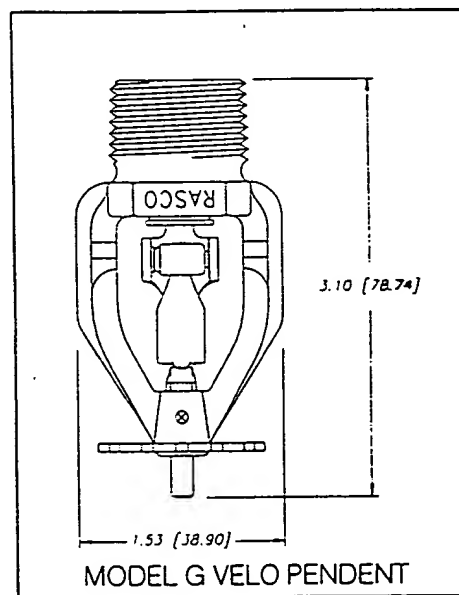

MODEL G VELO PENDENT

BEST AVAILABLE COPY

The equipment presented in this bulletin is to be installed in accordance with the latest published standards of the National Fire Protection Association, Factory Mutual Research Corporation, or other similar organizations and also with the provisions of governmental codes or ordinances whenever applicable.

Products manufactured and distributed by Reliable have been protecting life and property for over 70 years, and are installed and serviced by the most highly qualified and reputable sprinkler contractors located throughout the United States, Canada and foreign countries.

Manufactured by

Reliable®

The Reliable Automatic Sprinkler Co., Inc.

(800) 431-1588

(800) 848-6051

(914) 668-3470

<http://www.reliable-sprinkler.com>

Sales Offices

Sales Fax

Corporate Offices

Internet Address



Recycled Paper

Revision lines indicate updated or new data.

E.G. Printed in U.S.A. 10/97. P/N 9999970138